



Maintained / Non-Maintained Flame Proof EXIT Lights

An Industrial Range of Flame Proof Emergency Lights Approved by CMRI in Die Cast Aluminum Heat Resistant Clear Borosil Glass Diffuser, With self Contained Ni-Mh/Ni-Cd Batteries In Non-Maintained and Maintained Modes.

111 EL/NM/ (FP) (EXIT)

Non - Maintained

2 hrs. Backup

1 x 11 W CFL

Ni-Mh / Ni-Cd Rechargeable Battery

16 to 24 hrs. Rechargeable Period

Constant Current Charger

118 EL/M (FP) (EXIT)

Maintained


2 hrs. Backup

1 x 18 W CFL

Ni-Mh / Ni-Cd Rechargeable Battery

16 to 24 hrs. Rechargeable Period

Constant Current Charger

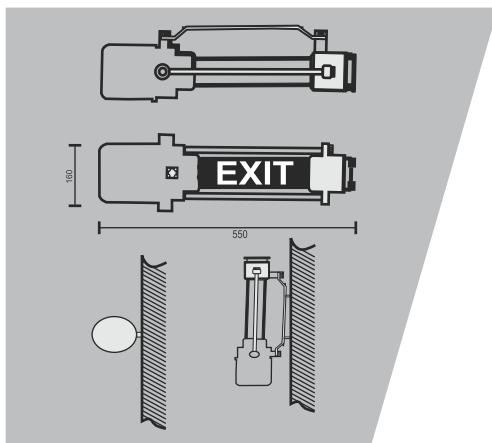

*SELF CONTAINED
RECHARGEABLE EMERGENCY
EMERGENCY LIGHTS*

- Conforms to IS : 9583 - 1981
- Battery Duration $\pm 10\%$
- Aluminum CMRI Certified Housing
- Red LED "ON" Indicates Charging
- Input ~ 230 V, 50 Hz (Other Available)
- Also Available with Higher Backup



Maintained Flame Proof EXIT Lights

An Industrial Range of Flame Proof Emergency Lights Approved by CMRI in Die Cast Aluminum Heat Resistant Clear Borosil Glass Diffuser, With self Contained Ni-Mh/Ni-Cd Batteries In Non-Maintained and Maintained Modes.


LED EL / M (FP)

Maintained
3 hrs. Backup
5 W LED

Ni-Mh / Ni-Cd Rechargeable Battery
16 to 24 hrs. Rechargeable Period
Constant Current Charger

LED EL / NE (FP)

Non-Emergency
Battery Backup (N/A)
5 W LED

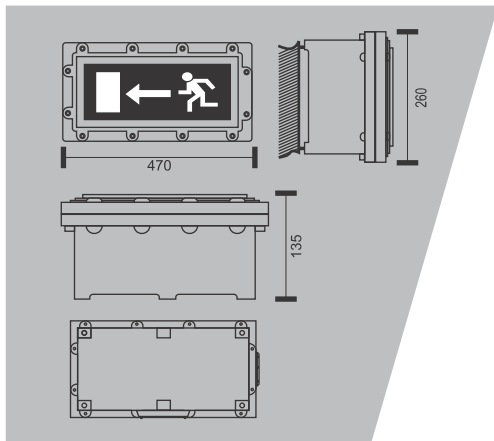

*SELF CONTAINED
RECHARGEABLE EMERGENCY
EMERGENCY LIGHTS*

- Conforms to IS : 9583 - 1981
- Battery Duration $\pm 10\%$
- Aluminum CMRI Certified Housing
- Red LED "ON" Indicates Charging
- Input ~ 230 V, 50 Hz (Other Available)
- Also Available with Higher Backup